

Model: C70 D6
 Frequency: 60
 Fuel Type: Diesel

» Generator set data sheet
 87.5 kVA Standby



Our energy working for you.™

Spec sheet:	SS3-CPGK
Noise data sheet (Open/enclosed):	ND50-OS550 / ND50-CS550
Airflow data sheet:	AF50-550
Derate data sheet (Open/enclosed):	DD50-OS550 / DD50-CS550
Transient data sheet:	TD50-550

Fuel consumption	Standby				Prime			
	Kw (kVA)				Kw (kVA)			
Ratings	70 (87.5)				65 (81.3)			
Load	1/4	1/2	3/4	Full	1/4	1/2	3/4	Full
US gph	1.4	2.3	3.3	4.4	1.3	2.2	3.1	4.0
L/hr	6	11	15	20	6	10	14	18

Engine	Standby rating	Prime rating
Engine manufacturer	Cummins	
Engine model	4BTA3.9G2	
Configuration	4 Cycle; In-line; 4 Cylinder Diesel	
Aspiration	Turbo Charged and Acket Water aftercooled	
Gross engine power output, kW/m	84	77
BMEP at set rated load, kPa	1426	1310
Bore, mm	102	
Stroke, mm	120	
Rated speed, rpm	1800	
Piston speed, m/s	7.2	
Compression ratio	16.5:1	
Lube oil capacity, L	9.5	
Overspeed limit, rpm	2100 ±50	
Regenerative power, kW	11.9	
Governor type	Electronic	
Starting voltage	12 Volts DC	

Fuel flow	
Maximum fuel flow, L/hr	30
Maximum fuel inlet restriction, mm Hg	102
Maximum fuel inlet temperature (°C)	60

Air	
Combustion air, m³/min	6
Maximum air cleaner restriction, kPa	6.2



Exhaust	Standby rating	Prime rating
Exhaust gas flow at set rated load, m ³ /min	14.4	13.6
Exhaust gas temperature, °C	475	461
Maximum exhaust back pressure, kPa	10.2	

Standard set-mounted radiator cooling		
Ambient design, °C	50	
Fan load, KW _m	3	
Coolant capacity (with radiator), L	10.6	
Cooling system air flow, m ³ /min @ 12.7mmH ₂ O	1.8	
Total heat rejection, BTU/min	2350	2135
Maximum cooling air flow static restriction mmH ₂ O	19.1	

Open set derating factors kVA (kW)

Note: Standard open genset options running at 400V, 150m above sea level. For enclosed product derates, please refer to datasheet - DD50-CS550.

	27°C	40°C	45°C	50°C	55°C
Standby	87.5 (70)	87.5 (70)	87.5 (70)	87 (69.6)	84.1 (67.3)
Prime	79.5 (63.6)	79.5 (63.6)	79.5 (63.6)	79 (63.2)	76.5 (61.2)


Weights*	Open	Enclosed
Unit dry weight kgs	1014	1654
Unit wet weight kgs	1050	1785

* Weights represent a set with standard features. See outline drawing for weights of other configurations

Dimensions	Length	Width	Height
Standard open set dimensions	1950	1046	1221
Enclosed set standard dimensions	2279.5	1084	1478

Genset outline

Open set

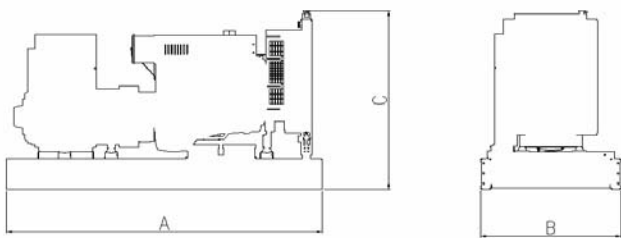

Enclosed set



Outlines are for illustrative purposes only. Please refer to the genset outline drawing for an exact representation of this model.

Alternator data

Feature code	Connection ¹	Temp rise degrees C	Duty ²	Alternator	Voltage
B682	Wye, 3 Phase	150/125C	S/P	UC224F	416-480V

Ratings definitions

Emergency Standby Power (ESP)	Limited-Time running Power	Prime Power (PRP):	Base Load (Continuous) Power
Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power to a constant electrical load for limited hours. Limited Time Running Power (LTP) is in accordance with ISO 8528.	Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous Power (COP) in accordance with ISO 8528, ISO 3046, AS 2789, DIN 6271 and BS 5514.

Formulas for calculating full load currents:

Three phase output

$$\frac{\text{kW} \times 1000}{\text{Voltage} \times 1.73 \times 0.8}$$

Single phase output

$$\frac{\text{kW} \times \text{SingleP} \text{ haseFactor} \times 1000}{\text{Voltage}}$$

See your distributor for more information.

Cummins Power Generation
 Manston Park, Columbus Avenue
 Manston, Ramsgate
 Kent CT12 5BF, UK
 Telephone: +44 (0) 1843 255000
 Fax: +44 (0) 1843 255902
 E-Mail: cpg.uk@cummins.com
 Web: www.cumminspower.com